


Sealed Brass Nozzle Band Heater

Standard leads are stainless steel armor braid with ground wire.
Includes 1 meter leads.

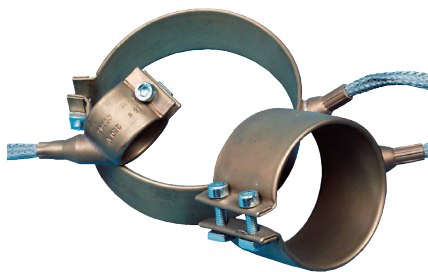

- Mica insulated sealed brass bands
- High watt density
- Twin low profile clamp bolts
- Stainless braided leads
- Super smooth to reduce cold spots
- Manually adjustable exit leads
- As used by many major OEMs

METRIC		IMPERIAL		WATTS	CATALOG NO.
dia	width	dia	width		
25	20	1"	3/4"	80	R252080C
	25	1"	1"	85	R252585C
	50	1"	2"	225	R2550225C
35	20	1 3/8"	3/4"	110	R352095C
	25	1 3/8"	1"	120	R3525120C
	30	1 3/8"	1 3/16"	145	R3530145C
	35	1 3/8"	1 3/8"	170	R3535170C
	40	1 3/8"	1 9/16"	195	R3540210C
	50	1 3/8"	2"	265	R3550265C
38	25	1 1/2"	1"	140	R3825140C
	30	1 1/2"	1 3/16"	165	R3830185C
	40	1 1/2"	1 9/16"	175	R3840175C
	50	1 1/2"	2"	300	R3850300C
40	25	1 9/16"	1"	140	R4025140C
	30	1 9/16"	1 3/16"	165	R4030165C
	40	1 9/16"	1 9/16"	225	R4040225C
	45	1 9/16"	1 3/4"	250	R4045305C
	50	1 9/16"	2"	345	R4050345C

METRIC		IMPERIAL		WATTS	CATALOG NO.
dia	width	dia	width		
45	25	1 3/4"	1"	155	R4525155C
	30	1 3/4"	1 3/16"	190	R4530190C
	40	1 3/4"	1 9/16"	250	R4540250C
50	25	2"	1"	175	R5025175C
	35	2"	1 3/8"	245	R5035245C
	40	2"	1 9/16"	280	R5040280C
	50	2"	2"	350	R5050350C
55	50	2 3/16"	2"	385	R5550385C
60	30	2 3/8"	1 3/16"	250	R6030250C
	35	2 3/8"	1 3/8"	295	R6035295C
	40	2 3/8"	1 9/16"	335	R6040335C
	50	2 3/8"	2"	420	R6050475C
75	30	3"	1 3/16"	340	R7530340C
	50	3"	2"	525	R7550590C