

Date Stamp Plus*



Blind hole applications

Features:

- Blind hole installation
- Cavity side (front) removable
- Press-fit installation
- Incorporated air vent

Benefits:

- Designed for ease of installation & removal
- Does not disrupt cooling channels
- No knock out hole required
- Can be installed & removed while in press
- Center insert sits flush & tight
- Exact outer number positioning

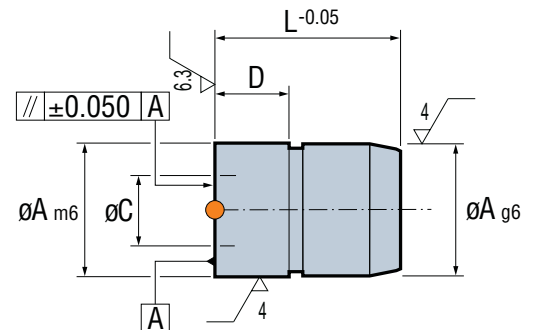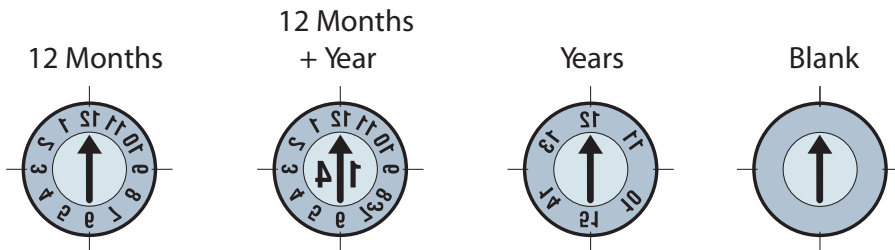

12 Months Arrow Only	12 Months + Yr.	Years	Blank	A mm	C mm	D mm	L mm
DSFP 0422	DSFP 0422-..	DSFP 04-Y..	DSFP 04BLANK-A	4	2.2	5.5	12
DSFP 0530	DSFP 0530-..	DSFP 05-Y..	DSFP 05BLANK-A	5	3	5.5	12
DSFP 0632	DSFP 0632-..	DSFP 06-Y..	DSFP 06BLANK-A	6	3.2	8	20
DSFP 0847	DSFP 0847-..	DSFP 08-Y..	DSFP 08BLANK-A	8	4.7	8	20
DSFP 1057	DSFP 1057-..	DSFP 10-Y..	DSFP 10BLANK-A	10	5.7	8	20
DSFP 1267	DSFP 1267-..	DSFP 12-Y..	DSFP 12BLANK-A	12	6.7	8	20
DSFP 1687	DSFP 1687-..	DSFP 16-Y..	DSFP 16BLANK-A	16	8.7	8	20
DSFP 20107	DSFP 20107-..	DSFP 20-Y..	DSFP 20BLANK-A	20	10.7	8	20

Note: When ordering, add year to the end of part number (DSFP 0422-14)


Part Number	Part Description
EF322405-SET	Removal jig extractor

Note: The removal jig extractor should only be used with PCS Date Stamp Plus assemblies.
Do not use the removal jig extractor to remove PCS Standard Date Stamp assemblies.

*Patented CUMSA System

Date Stamp Plus*

Blind hole applications

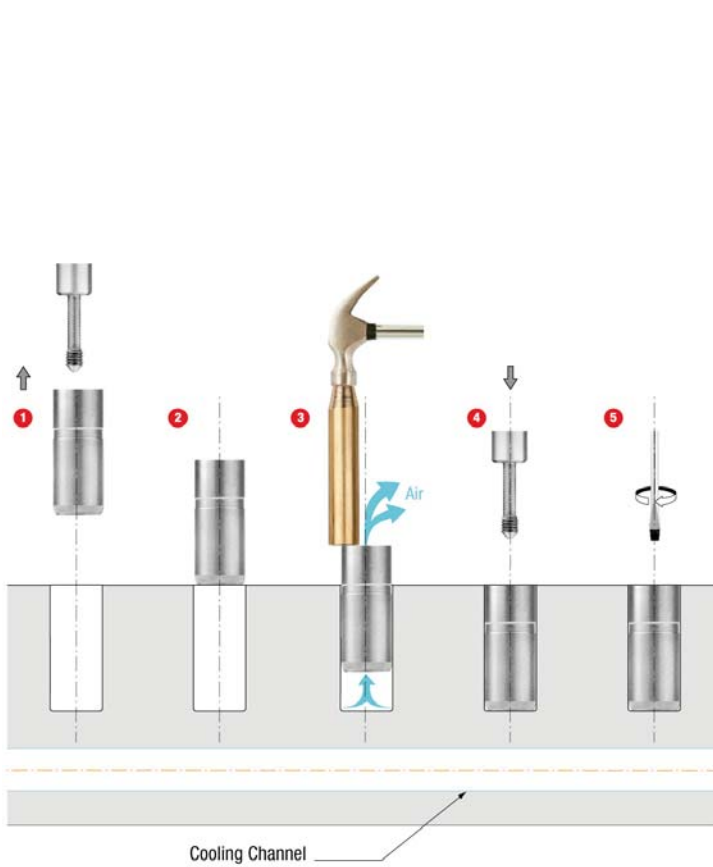

Installation Instructions



Removal Instructions



Note: The removal jig extractor should only be used with PCS Date Stamp Plus assemblies. Do not use the removal jig extractor to remove PCS Standard Date Stamp assemblies.

Removal jig extractor
 Part no. EF322405-SET**
 **Sold separately