

RUD® Hoist Rings & Eyebolts maximize strength and wear-resistance without compromise.

VRS-F StarPoint®



VLBG Load Ring




VWBG Load Ring



VRS-F StarPoint® Swivel Eyebolt

The VRS-F StarPoint® Swivel Eyebolt offers the highest level of safety available with its swivel capability that adjusts to the direction of the load ensuring that the Working Load Limit (WLL) is never diminished.

- Available in sizes 5/16" to 2"
- Clear identification of working load limit (WLL) rated at 90° from thread on body of eyebolt
- Pivots 360° to the direction of the load lift so that the WLL is always at the direction of the load
- Complies with the US-Standard (ASME B30.26)
- Supplied with an annealed easy-fit key for simple assembly and disassembly

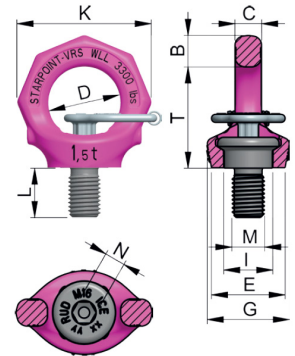


CATALOG NO.	THREAD SIZE (M)	WLL lbs.	T	B	C	D	E	G	K	L	N	I	WEIGHT (lbs.)
VRSF-51618-660	5/16"-18UNC	660	1.34	0.44	0.34	1	1	1.13	1.88	0.47	1/4	0.56	0.25
VRSF-3816-880	3/8"-16UNC	880	1.34	0.44	0.34	1	1	1.13	1.88	0.56	1/4	0.59	0.26
VRSF-71614-880	7/16"-14UNC	880	1.34	0.44	0.34	1	1	1.13	1.88	0.59	1/4	0.59	0.26
VRSF-1213-1650	1/2"-13UNC	1650	1.66	0.5	0.34	1.19	1.19	1.34	2.19	0.75	5/16	0.71	0.45
VRSF-5811-3300	5/8"-11UNC	3300	1.94	0.59	0.56	1.38	1.38	1.56	2.56	0.94	3/8	0.88	0.75
VRSF-3410-5070	3/4"-10UNC	5070	2.25	0.66	0.63	1.56	1.56	2	2.94	1.19	1/2	1.09	1.2
VRSF-789-5070	7/8"-9UNC	5070	2.25	0.66	0.63	1.56	1.56	2	2.94	1.31	1/2	1.09	1.3
VRSF-18-7050	1"-8UNC	7050	2.72	0.81	0.75	1.88	1.88	2.38	3.53	1.5	9/16	1.31	2.2
VRSF-1187-7050	1 1/8"-7UNC	7050	2.72	0.81	0.75	1.88	1.88	2.38	3.53	1.5	9/16	1.31	2.2
VRSF-1147-9920	1 1/4"-7UNC	9920	3.38	1	0.94	2.38	2.38	2.94	4.41	1.88	5/8	1.63	4.2
VRSF-1126-15430	1 1/2"-6UNC	15430	4	1.25	1.13	2.84	2.94	3.34	5.31	2.13	7/8	1.94	7.6
VRSF-1345-19480	1 3/4"-5UNC	19480	4.75	1.5	1.34	3.22	3.34	4.13	6.25	2.5	1	2.28	11.6
VRSF-245-26450	2"-4.5UNC	26450	5.38	1.69	1.5	3.69	3.94	4.75	7.06	2.81	1-1/8	2.59	17.5

RUD® VLBG Load Ring

The RUD® VLBG Load Ring is ideal for side mounting and often used for moving loads in applications that require overhead lifting and moving of heavy equipment. The RUD® VLBG Load Ring can turn 360° and is adjustable to the direction of the pull. The Load ring is foldable guaranteeing full WLL in all directions.

- Available in sizes 3/8" to 1-1/4"
- Clear identification of working load limit (WLL) and thread size on bolt head
- Forged material (1.6541) alloy steel wrenched and tempered
- Body and bolt 100% electromagnetic crack tested in accordance with specification EN 1677
- Can turn 360° and is adjustable to direction of the pull

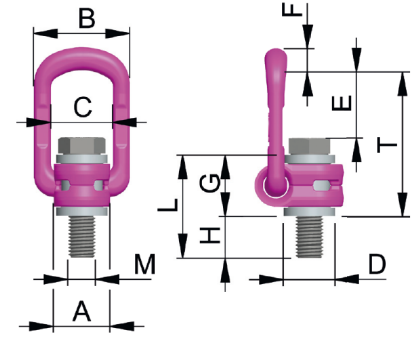


CATALOG NO.	THREAD SIZE (M)	WLL (lbs.)	A	B	C	D	E	F	G	H	J	K	L	N	T	WT. (lbs.)	TORQUE (ft. lbs.)
VLBG-3816-1388	3/8"-16UNC	1388	1.18	2.13	1.34	0.94	1.54	0.39	1.14	0.63	2.95	1.77	1.77	1.26	2.95	0.7	44
VLBG-1213-2200	1/2"-13UNC	2200	1.26	2.13	1.34	1.02	1.46	0.39	1.14	0.87	2.95	1.77	1.97	1.26	2.95	0.7	75
VLBG-5811-3300	5/8"-11UNC	3300	1.3	2.2	1.42	1.18	1.5	0.53	1.42	0.94	3.43	1.85	2.36	1.49	3.35	1.2	110
VLBG-3410-5500	3/4"-10UNC	5500	1.97	3.23	2.13	1.77	2.13	0.65	1.69	1.1	4.45	2.52	2.8	1.88	4.33	2.9	185
VLBG-789-5500	7/8"-9UNC	5500	1.97	3.23	2.13	1.77	2.05	0.65	1.69	1.06	4.45	2.52	2.76	1.88	4.33	2.9	225
VLBG-18-8800	1"-8UNC	8800	1.97	3.23	2.13	1.77	2.52	0.71	1.69	1.61	5.12	3.07	3.31	1.88	4.92	3.3	300
VLBG-1147-11000	1-1/4"-7UNC	11000	2.36	4.06	2.56	2.36	2.52	0.89	2.4	1.61	5.94	3.15	4.02	2.63	5.79	7.3	370

RUD® VWBG Load Ring

The RUD® VWBG Load Ring is suitable for all loads which swivel and tilt, so it can be loaded in all directions with a 4:1 safety factor.

- Available in sizes 5/16" to 1-1/4"
- Clear identification of working load limit (WLL)
- Wear marks in the main load directions 45°, 30°, and 0°
- Not suitable for permanent swiveling under full load, especially in 90° direction

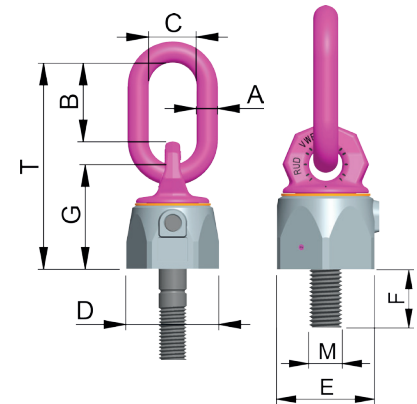

CATALOG NO.	THREAD SIZE (M)	WLL (x) lbs.	WLL (y) lbs.	WLL (z) lbs.	A	B	C	D	T	F	G	E	SW	WEIGHT (lbs.)
VWBG-51618-X660	5/16"-18UNC	660	880	1320	0.31	1.22	1.16	1.18	3	0.5	1.42	1.10	1.1	0.57
VWBG-3816-X990	3/8"-16UNC	990	1300	1980	0.31	1.31	1.16	1.42	3.06	0.67	1.5	1.18	1.18	0.6
VWBG-1213-X1320	1/2"-13UNC	1320	1650	2640	0.38	1.94	1.38	1.65	4.22	0.81	1.88	1.41	1.42	0.9
VWBG-5811-X2860	5/8"-11UNC	2860	3300	5720	0.5	1.81	1.5	1.89	4.5	0.94	2.19	1.61	1.61	1.3
VWBG-3410-X4400	3/4"-10UNC	4400	5500	8800	0.5	2.13	1.38	2.52	5.38	1.13	2.63	2.16	2.17	3.1
VWBG-18-X7700	1"-8UNC	7700	8800	15400	0.69	2.63	1.56	3.19	6.81	1.5	3.47	2.75	2.76	5.8
VWBG-1147-X11000	1-1/4"-7UNC	11000	13200	22000	0.88	3.53	1.97	3.9	8.69	1.88	4.19	3.34	3.35	11.2