


Wire EDM Blanks



Features

- Designed to save time and money
- Prepared and ready for insert production, starter hole included
- Through hardened
- Ground top and bottom, milled sides

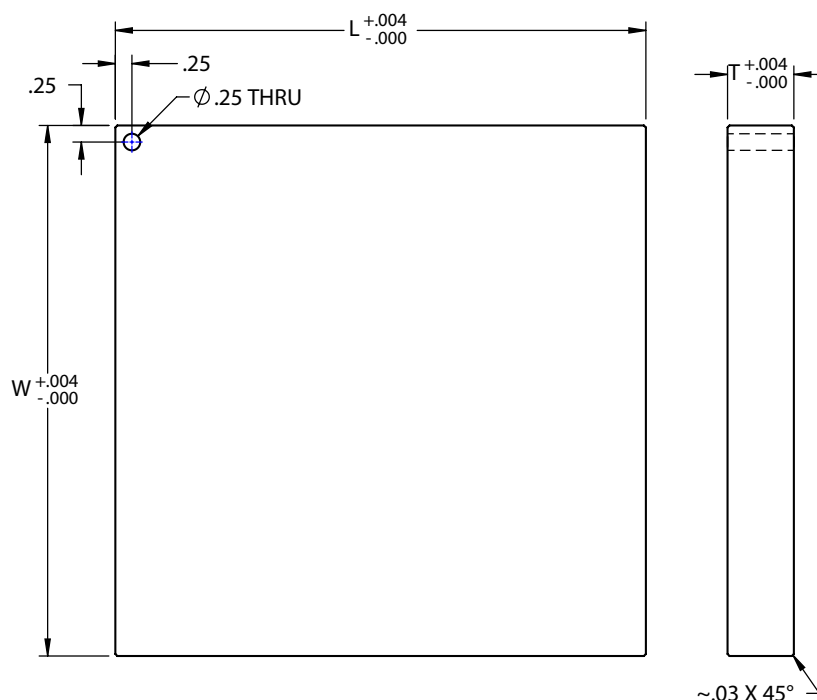

U Inch

Material	Item Number	T	W	L
DHA-WORLD	EDM-DHAW-10-80-80	1.00	8.00	8.00
	EDM-DHAW-20-80-80	2.00		
	EDM-DHAW-30-80-80	3.00		
S-STAR	EDM-SSTAR-10-80-80	1.00	8.00	8.00
	EDM-SSTAR-20-80-80	2.00		
	EDM-SSTAR-30-80-80	3.00		
DCMX	EDM-DCMX-10-80-80	1.00	8.00	8.00
	EDM-DCMX-20-80-80	2.00		
	EDM-DCMX-30-80-80	3.00		

DHA-World (~H-13)

- Hardness: 50-52 HRC
- Higher Charpy Impact than H-13
- Higher fracture toughness than H-13

S-Star (420 ESR Stainless Steel)

- Hardness: 51-53 HRC
- Excellent corrosion resistance
- Superb mirror finish

DCMX (Matrix Type Cold Work Steel)

- Hardness: 59-61 HRC
- Vs M2: Similar wear resistance and 2.5X toughness
- Vs A2: Higher wear resistance and toughness, 2X fatigue strength
- Vs D2: 3X toughness, 4X fatigue strength, with only slightly reduced wear resistance
- Vs S7: 2X wear resistance and 2X fatigue strength, with slightly reduced toughness

