


Stainless Steel Ejector Pins

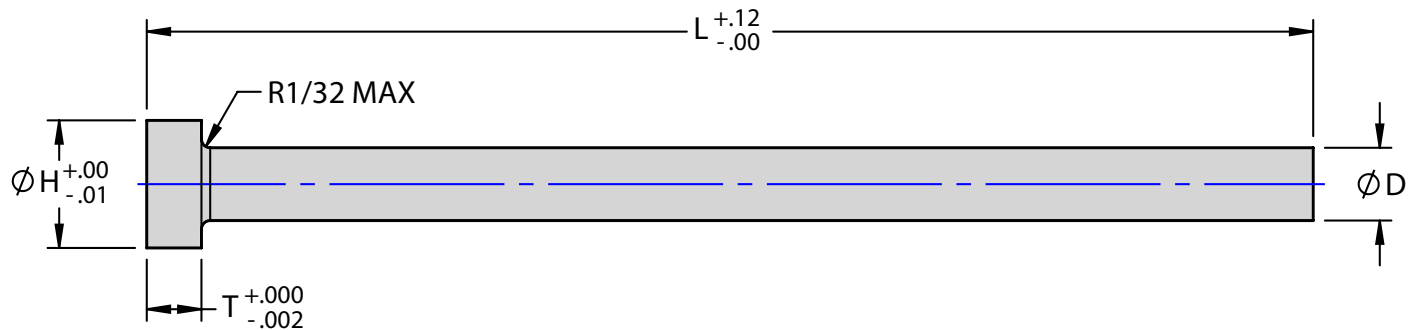

U Inch **M** SUS440C Stainless Steel **H** 56 - 60 HRC

Nominal Pin Dia.	D Actual Pin Dia.	D Tolerance	H Head Dia.	T Head Thickness	L Overall Length	
					6"	10"
1/16	.0620	+.0000/-.0003	.250	.125	SSEP-116-6	SSEP-116-10
5/64	.0776	+.0000/-.0003	.250	.125	SSEP-564-6	SSEP-564-10
3/32	.0933	+.0000/-.0003	.250	.125	SSEP-332-6	SSEP-332-10
7/64	.1089	+.0000/-.0003	.250	.125	SSEP-764-6	SSEP-764-10
1/8	.1245	+.0000/-.0003	.250	.125	SSEP-18-6	SSEP-18-10
5/32	.1557	+.0000/-.0003	.281	.156	SSEP-532-6	SSEP-532-10
3/16	.1870	+.0000/-.0003	.375	.187	SSEP-316-6	SSEP-316-10
7/32	.2183	+.0000/-.0003	.406	.187	SSEP-732-6	SSEP-732-10
1/4	.2495	+.0000/-.0003	.437	.187	SSEP-14-6	SSEP-14-10
5/16	.3120	+.0000/-.0003	.500	.250	SSEP-516-6	SSEP-516-10
3/8	.3745	+.0000/-.0003	.625	.250	SSEP-38-6	SSEP-38-10
1/2	.4995	+.0000/-.0003	.750	.250	SSEP-12-6	SSEP-12-10

Features

- Wear and corrosion resistant
- Ideal for molding PVC and other corrosive plastics, medical, humid or cleanroom environments.
- Annealed Head

