


M-2 Ejector Pins

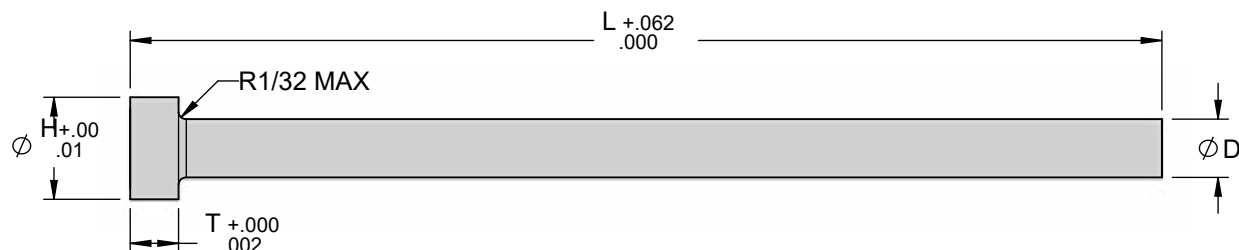

U **M** M-2 High Speed Steel **H** 60-63 HRC

Nominal Pin Dia.	D Actual Pin Dia.	D Tolerance	H Head Dia.	T Head Thick- ness	L Overall Length		
					3"	6"	10"
1/32	.0307	+.0000/- .0003	.250	.125	M2P-132-3	M2P-132-6	
3/64	.0464	+.0000/- .0003	.250	.125	M2P-364-3	M2P-364-6	
1/16	.0620	+.0000/- .0003	.250	.125	M2P-116-3	M2P-116-6	M2P-116-10
5/64	.0776	+.0000/- .0003	.250	.125	M2P-564-3	M2P-564-6	M2P-564-10
3/32	.0933	+.0000/- .0003	.250	.125	M2P-332-3	M2P-332-6	M2P-332-10
7/64	.1089	+.0000/- .0003	.250	.125		M2P-764-6	M2P-764-10
1/8	.1245	+.0000/- .0003	.250	.125	M2P-18-3	M2P-18-6	M2P-18-10
9/64	.1401	+.0000/- .0003	.250	.125		M2P-964-6	M2P-964-10
5/32	.1557	+.0000/- .0003	.281	.156	M2P-532-3	M2P-532-6	M2P-532-10
11/64	.1714	+.0000/- .0003	.343	.187		M2P-1164-6	M2P-1164-10
3/16	.1870	+.0000/- .0003	.375	.187	M2P-316-3	M2P-316-6	M2P-316-10
13/64	.2026	+.0000/- .0003	.375	.187		M2P-1364-6	M2P-1364-10
7/32	.2183	+.0000/- .0003	.406	.187		M2P-732-6	M2P-732-10
15/64	.2339	+.0000/- .0003	.406	.187		M2P-1564-6	M2P-1564-10
1/4	.2495	+.0000/- .0003	.437	.187	M2P-14-3	M2P-14-6	M2P-14-10
5/16	.3120	+.0000/- .0003	.500	.250	M2P-516-3	M2P-516-6	M2P-516-10
3/8	.3745	+.0000/- .0003	.625	.250	M2P-38-3	M2P-38-6	
7/16	.4370	+.0000/- .0003	.687	.250	M2P-716-3		M2P-716-10
1/2	.4995	+.0000/- .0003	.750	.250	M2P-12-3	M2P-12-6	M2P-12-10

Features

- High wear resistance
- Through hardened, can be used as ejector or core pin
 - Ideal for forming molding detail with high quality surface finish

