









## PCS Standard Date Stamps

- Includes body and center insert
- Center insert sits flush within body
- Designed for efficient installation and removal
- Stainless steel construction
- Provides excellent traceability

These date stamp assembly are made of stainless steel. The Center Insert is always at the same level as the body of the date stamp. Diameters ranging 4 mm to 20 mm are available. Center Inserts are easily changed reducing downtime.

|  |  |  |  |  |  |      |      |    |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|------|------|----|
| MONTH                                                                             | INSERT                                                                            | DAY                                                                               | SHIFT                                                                             | YEAR                                                                               | A                                                                                   | C    | J    | L  |
| DS 0422-xx                                                                        | DP 2275-xx                                                                        |                                                                                   | DS 04-03                                                                          | DS 04-Y-xx                                                                         | 4                                                                                   | 2.2  | 7.5  | 12 |
| DS 0530-xx                                                                        | DP 3075-xx                                                                        | DS 05-31L                                                                         | DS 05-03                                                                          | DS 05-Y-xx                                                                         | 5                                                                                   | 3.0  | 7.5  | 12 |
| DS 0632-xx                                                                        | DP 3217-xx                                                                        | DS 06-31L                                                                         | DS 06-03                                                                          | DS 06-Y-xx                                                                         | 6                                                                                   | 3.2  | 17.0 | 20 |
| DS 0847-xx                                                                        | DP 4717-xx                                                                        | DS 08-31L                                                                         | DS 08-03                                                                          | DS 08-Y-xx                                                                         | 8                                                                                   | 4.7  | 17.0 | 20 |
| DS 1057-xx                                                                        | DP 5717-xx                                                                        | DS 10-31L                                                                         | DS 10-03                                                                          | DS 10-Y-xx                                                                         | 10                                                                                  | 5.7  | 17.0 | 20 |
| DS 1267-xx                                                                        | DP 6717-xx                                                                        | DS 12-31L                                                                         | DS 12-03                                                                          | DS 12-Y-xx                                                                         | 12                                                                                  | 6.7  | 17.0 | 20 |
| DS 1687-xx                                                                        | DP 8717-xx                                                                        | DS 16-31L                                                                         | DS 16-03                                                                          | DS 16-Y-xx                                                                         | 16                                                                                  | 8.7  | 17.0 | 20 |
| DS 20107-xx                                                                       | DP 10717-xx                                                                       | DS 20-31L                                                                         | DS 20-03                                                                          | DS 20-Y-xx                                                                         | 20                                                                                  | 10.7 | 17.0 | 20 |

**Note:** Mold operating temperature should not exceed 150°C (300°F). When ordering add year to the end of the part number (i.e. DS 0632-18) or for assembly with arrow only (i.e. DS 0632)



| ENGRAVING DEPTH INCHES |             |             |             |
|------------------------|-------------|-------------|-------------|
| Size                   | Characters  | Arrow Head  | Arrow Body  |
| 3 mm                   | .004 - .008 | .016 - .020 | .016 - .020 |
| 4 - 5 mm               | .004 - .006 | .016 - .020 | .016 - .022 |
| 6 mm                   | .004 - .008 | .016 - .020 | .016 - .020 |
| 8 mm                   | .006 - .010 | .016 - .020 | .016 - .020 |
| 10 - 16 mm             | .008 - .012 | .020 - .024 | .020 - .024 |
| 20 mm                  | .008 - .012 | .020 - .024 | .020 - .024 |

| CENTER INSERTS<br>WITH ARROW & YEAR |      |      |
|-------------------------------------|------|------|
| ITEM NO.                            | C    | J    |
| DP 2275-xx                          | 2.2  | 7.5  |
| DP 3075-xx                          | 3.0  | 7.5  |
| DP 3217-xx                          | 3.2  | 17.0 |
| DP 4717-xx                          | 4.7  | 17.0 |
| DP 5717-xx                          | 5.7  | 17.0 |
| DP 6717-xx                          | 6.7  | 17.0 |
| DP 8717-xx                          | 8.7  | 17.0 |
| DP 10717-xx                         | 10.7 | 17.0 |

**Note:** When ordering add year to the end of the catalog number (i.e. DP 3217-18)

## PCS Center Inserts

- Sits flush within body assembly
- Designed for efficient installation and removal
- Stainless steel construction
- Provides excellent traceability




This center insert has a stainless steel construction and is always at the same level as the body of the date stamp. Diameters ranging 4 mm to 20 mm are available. Center Inserts are easily changed reducing downtime.

### SPECIFICATIONS

|                 |              |
|-----------------|--------------|
| Hardness        | 48 - 54 Rc   |
| Material Type   | INOX. 1.4034 |
| Unit of Measure | Metric DIN   |

### CH Series


Compact Height



| ITEM NO. | A mm | B mm |
|----------|------|------|
| DCP04-AO | 2.2  | 8    |
| DCP04-   | 2.2  | 8    |
| DCP05-AO | 3.1  | 8    |
| DCP05-   | 3.1  | 8    |
| DCP06-AO | 3.1  | 8    |
| DCP06-   | 3.1  | 8    |
| DCP08-AO | 4.4  | 10   |
| DCP08-   | 4.4  | 10   |
| DCP10-AO | 5.2  | 12   |
| DCP10-   | 5.2  | 12   |
| DCP12-AO | 6.2  | 14   |
| DCP12-   | 6.2  | 14   |
| DCP16-AO | 8.2  | 14   |
| DCP16-   | 8.2  | 14   |
| DCP20-AO | 11   | 16   |
| DCP20-   | 11   | 16   |

### RF Series

Remains Flush



| ITEM NO. | A mm | B mm |
|----------|------|------|
| DFP03-AO | 1.6  | 9    |
| DFP03-   | 1.6  | 9    |
| DFP04-AO | 2.5  | 10.5 |
| DFP04-   | 2.5  | 10.5 |
| DFP05-AO | 3.1  | 13   |
| DFP05-   | 3.1  | 13   |
| DFP06-AO | 3.1  | 13   |
| DFP06-   | 3.1  | 13   |
| DFP08-AO | 4.6  | 14   |
| DFP08-   | 4.6  | 14   |
| DFP10-AO | 4.6  | 14   |
| DFP10-   | 4.6  | 14   |
| DFP12-AO | 6.4  | 17   |
| DFP12-   | 6.4  | 17   |
| DFP16-AO | 8.4  | 23   |
| DFP16-   | 8.4  | 23   |

### STANDARD Series

PCS Standard



| ITEM NO.  | A mm | B mm |
|-----------|------|------|
| DP 2275   | 2.2  | 7.5  |
| DP 2275-  | 2.2  | 7.5  |
| DP 3075   | 3.0  | 7.5  |
| DP 3075-  | 3.0  | 7.5  |
| DP 3217   | 3.2  | 17   |
| DP 3217-  | 3.2  | 17   |
| DP 4717   | 4.7  | 17   |
| DP 4717-  | 4.7  | 17   |
| DP 5717   | 5.7  | 17   |
| DP 5717-  | 5.7  | 17   |
| DP 6717   | 6.7  | 17   |
| DP 6717-  | 6.7  | 17   |
| DP 8717   | 8.7  | 17   |
| DP 8717-  | 8.7  | 17   |
| DP 10717  | 10.7 | 17   |
| DP 10717- | 10.7 | 17   |

**Note:** When ordering add the two digit year to the end of the catalog number (i.e. DCP04-18)

**AO = Arrow Only**



## PCS Double Date Stamp

- Replaces the need for two separate date stamps
- Requires only one machined hole
- Stainless steel construction
- Provides excellent traceability

The Double Date Stamp replaces the need for two separate date stamps. With this unique feature, there is no need to machine two separate holes. The month and year on the Double Date Stamp is easily adjusted.



| SPECIFICATIONS  |              |
|-----------------|--------------|
| Hardness        | 48 - 54 Rc   |
| Material Type   | INOX. 1.4034 |
| Unit of Measure | Metric DIN   |

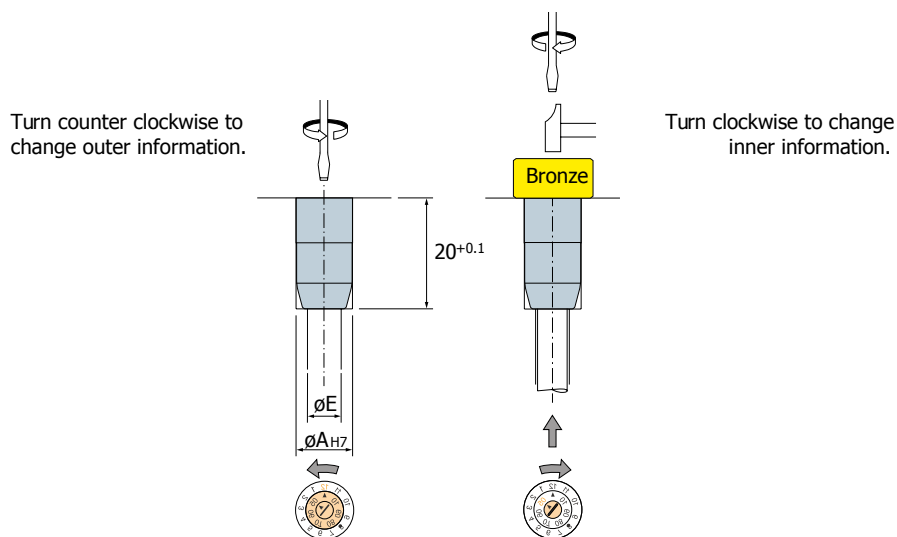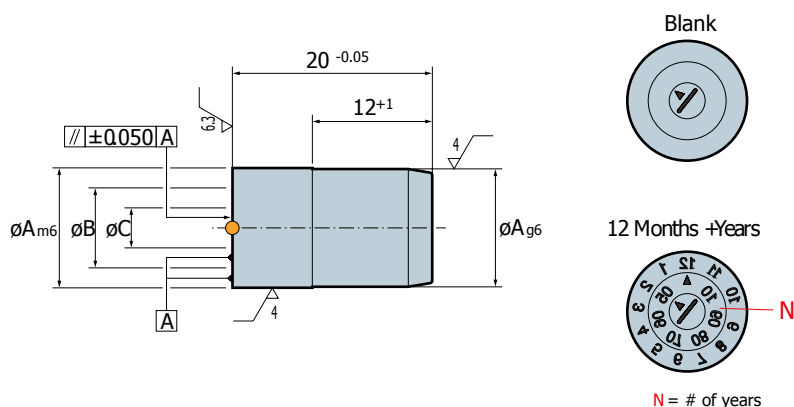


| ITEM NO.     | A  | B    | C   | E  | N  |
|--------------|----|------|-----|----|----|
| FD 080512-xx | 8  | 5.5  | 3   | 6  | 5  |
| FD 120812-xx | 12 | 8    | 4   | 10 | 6  |
| FD 161012-xx | 16 | 10.5 | 5.3 | 12 | 10 |

**Note:** When ordering add the two digit year to the end of the catalog number (i.e. FD 120812-18)

## Recycle Inserts

PCS Company offers Recycle Inserts that are engraved with SPI standards. Choose from 3 diameters and 7 material designations. There is a blank insert option with arrows only for custom engraving. Made of 420 stainless steel with hardness of 50-55 HRC. Unit of measure - millimeters.

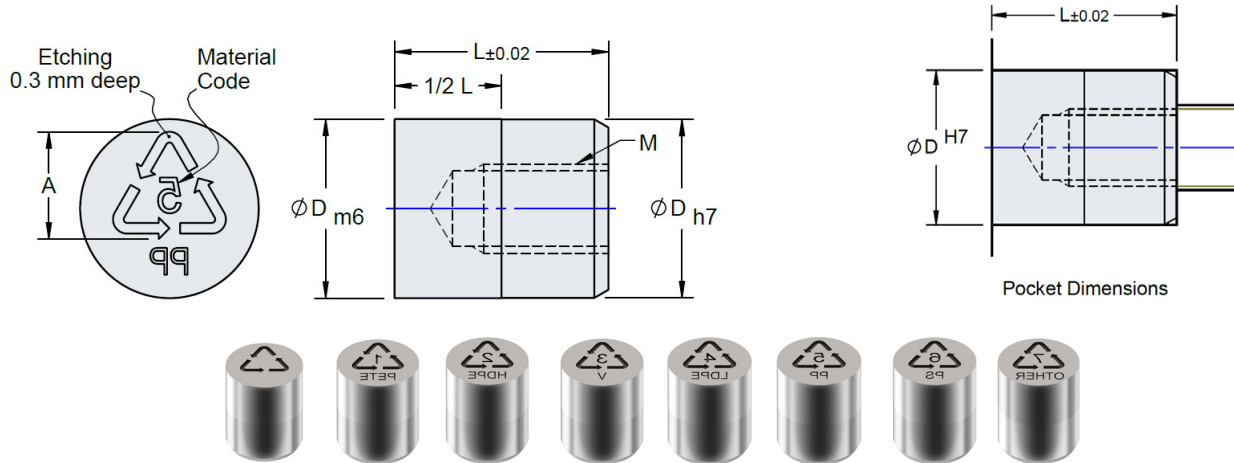

| Item Number | D Dia. | Material Code | Material                   | Marking Text | L Length | A Logo Height | M Thread |
|-------------|--------|---------------|----------------------------|--------------|----------|---------------|----------|
| RI-10-0     | 10     | N/A           | N/A                        | Blank        | 12       | 6             | M5x0.8   |
| RI-10-1     | 10     | 1             | Polyethylene Terephthalate | PETE         | 12       | 6             | M5x0.8   |
| RI-10-2     | 10     | 2             | High Density Polyethylene  | HDPE         | 12       | 6             | M5x0.8   |
| RI-10-3     | 10     | 3             | Polyvinyl Chloride         | V            | 12       | 6             | M5x0.8   |
| RI-10-4     | 10     | 4             | Low Density Polyethylene   | LDPE         | 12       | 6             | M5x0.8   |
| RI-10-5     | 10     | 5             | Polypropylene              | PP           | 12       | 6             | M5x0.8   |
| RI-10-6     | 10     | 6             | Polystyrene                | PS           | 12       | 6             | M5x0.8   |
| RI-10-7     | 10     | 7             | Other                      | OTHER        | 12       | 6             | M5x0.8   |
| RI-16-0     | 16     | N/A           | N/A                        | Blank        | 14       | 10            | M6x1.0   |
| RI-16-1     | 16     | 1             | Polyethylene Terephthalate | PETE         | 14       | 10            | M6x1.0   |
| RI-16-2     | 16     | 2             | High Density Polyethylene  | HDPE         | 14       | 10            | M6x1.0   |
| RI-16-3     | 16     | 3             | Polyvinyl Chloride         | V            | 14       | 10            | M6x1.0   |
| RI-16-4     | 16     | 4             | Low Density Polyethylene   | LDPE         | 14       | 10            | M6x1.0   |
| RI-16-5     | 16     | 5             | Polypropylene              | PP           | 14       | 10            | M6x1.0   |
| RI-16-6     | 16     | 6             | Polystyrene                | PS           | 14       | 10            | M6x1.0   |
| RI-16-7     | 16     | 7             | Other                      | OTHER        | 14       | 10            | M6x1.0   |
| RI-20-0     | 20     | N/A           | N/A                        | Blank        | 16       | 12            | M6x1.0   |
| RI-20-1     | 20     | 1             | Polyethylene Terephthalate | PETE         | 16       | 12            | M6x1.0   |
| RI-20-2     | 20     | 2             | High Density Polyethylene  | HDPE         | 16       | 12            | M6x1.0   |
| RI-20-3     | 20     | 3             | Polyvinyl Chloride         | V            | 16       | 12            | M6x1.0   |
| RI-20-4     | 20     | 4             | Low Density Polyethylene   | LDPE         | 16       | 12            | M6x1.0   |
| RI-20-5     | 20     | 5             | Polypropylene              | PP           | 16       | 12            | M6x1.0   |
| RI-20-6     | 20     | 6             | Polystyrene                | PS           | 16       | 12            | M6x1.0   |
| RI-20-7     | 20     | 7             | Other                      | OTHER        | 16       | 12            | M6x1.0   |