

90 Degree Elbows

Features

- Solid Brass Construction
- NPT threads

ITEM NO.	PIPE SIZE	WIDTH
EL-18	1/8	11/16
EL-14	1/4	1 1/8
EL-38	3/8	1 1/4
EL-50	1/2	1 9/16



90 Degree Street Elbows

Features

- Solid Brass Construction
- NPT threads

ITEM NO.	PIPE SIZE	HEIGHT	WIDTH
SL-18	1/8	15/16	11/16
SL-14	1/4	1 1/4	1
SL-38	3/8	1 3/8	3/8
SL-50	1/2	1 3/4	1 1/2




45 Degree Street Elbows

Features

- Solid Brass Construction
- NPT threads

ITEM NO.	PIPE SIZE
AL-18	1/8
AL-14	1/4
AL-38	3/8
AL-50	1/2

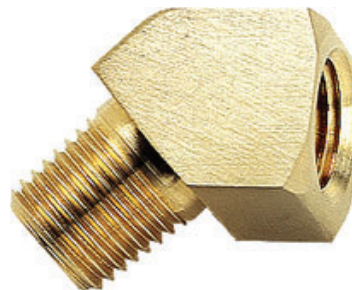

TEE's

Features

- Solid Brass Construction
- NPT threads


ITEM NO.	PIPE SIZE	HEIGHT	WIDTH
T-18	1/8	13/16	1 1/16
T-14	1/4	1 1/8	1 1/2
T-38	3/8	1 1/4	1 11/16
T-50	1/2	1 9/16	2 1/8



Male Hose Barbs

Features

- Solid Brass construction
- Use with any hose
- Barb design retains hose
- Use with hose clamps

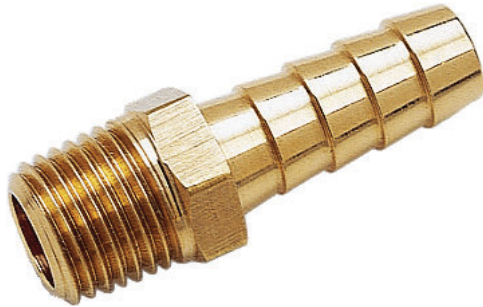

U Inch

ITEM NO.	HOSE I.D.	PIPE SIZE
B250-1	1/4	1/8
B250-2	1/4	1/4
B250-3	1/4	3/8
B312-1	5/16	1/8
B312-2	5/16	1/4
B375-1	3/8	1/8
B375-2	3/8	1/4
B375-3	3/8	3/8
B500-2	1/2	1/4
B500-3	1/2	3/8
B500-4	1/2	1/2
B700-4	3/4	1/2

Female Hose Barbs

Features

- Solid Brass construction
- Use with any hose
- Barb design retains hose
- Use with hose clamps



U Inch

ITEM NO.	HOSE I.D.	PIPE SIZE
FB14-2	1/4	1/8
FB14-4	1/4	1/4
FB15-4	5/16	1/4
FB38-2	3/8	1/8
FB38-4	3/8	1/4
FB50-6	1/2	3/8
FB50-8	1/2	1/2

Hose Splicers

Features

- Solid Brass construction
- Use with any hose
- Barb design retains hose
- Use with hose clamps



U Inch

ITEM NO.	HOSE I.D.	PIPE SIZE
HS-14	1/4 x 1/4	1/8
HS-38	1/4 x 3/8	1/4
HS-50	1/2 x 1/2	1/4



Push-Lok Hose Barbs


Features

- Solid Brass Construction
- Does not require the use of hose clamps

Push-Lok Hose Barbs are used to securely attach hose and do not require the use of hose clamps when used with Push-Lok hose.

U Inch

ITEM NO.	HOSE I.D.	PIPE SIZE
PLM-04-02	1/4	1/8
PLM-04-04	1/4	1/4
PLM-06-02	3/8	1/8
PLM-06-04	3/8	1/4
PLM-06-06	3/8	3/8
PLM-06-08	3/8	1/2
PLM-08-06	1/2	3/8
PLM-08-08	1/2	1/2
PLM-12-08	3/4	1/2
PLM-12-12	3/4	3/4




Combination Hose Inserts

Features

- Eliminates multi-fittings
- Excellent for retaining hose

Constructed of solid brass, Combination Hose Inserts eliminate the need for multiple fittings and assembly. Combination Hose Inserts allow hoses to be linked together in series.

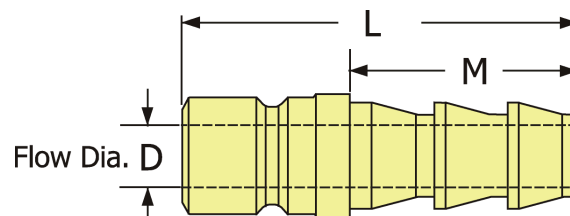

U Inch

ITEM NO.	HOSE I.D.	D FLOW DIAMETER	M BARB AREA LENGTH	L OVERALL LENGTH	FITS SOCKET SERIES
CM2-250	1/4	3/16	7/8	1-3/8	200
CM2-312	5/16	1/4	7/8	1-3/8	200
CM2-375	3/8	1/4	1-1/16	1-9/16	200
CM3-375	3/8	9/32	1-1/16	1-13/16	300
CM3-500	1/2	11/32	1-1/16	1-13/16	300
CM5-500	1/2	13/32	1-1/16	2	500
CM5-750	3/4	9/16	1-1/2	2-1/2	500



Hex Couplings

Features

- Solid Brass Construction
- NPT threads

ITEM NO.	PIPE SIZE
C-18	1/8
C-14	1/4
C-38	3/8
C050	1/2



Hex Nipples

Features

- Solid Brass Construction
- NPT threads

ITEM NO.	PIPE SIZE	LENGTH
MR18-1	1/8 x 1/16	1
MR14-2	1/4 x 1/8	1 3/16
MR38-4	3/8 x 1/4	1 7/16
MR50-6	1/2 x 3/8	1 5/8



Male Reducers

Features

- Solid Brass Construction
- NPT threads

ITEM NO.	PIPE SIZE	HEX SIZE	LENGTH
HN-18	1/8	7/16	1
HN-14	1/4	9/16	1 3/16
HN-38	3/8	11/16	1 7/16
HN-50	1/2	7/8	1 5/8



Reducing Bushings

Features

- Solid Brass Construction
- NPT threads

ITEM NO.	PIPE SIZE
RB18-1	1/8 x 1/16
RB14-2	1/4 x 1/8
RB38-4	1/8 x 1/4
RB50-6	1/4 x 3/8
RB75-8	3/8 x 1/2



Hose

Features

- Temperature: -40°F to 212°F or -40°C to 100°C (Normal Service)
- Temperature: +160°F or -40°C to +71°C (Air Only)
- Max. Working Pressure: 300 psi.
- Min. Burst Pressure - 1200 psi
- Tube: Type C Nitrile (Black)
- Reinforcement: Braided, synthetic textile
- Cover: Type C2 (Modified Nitrile)
- Use with Push-Lok / Lock-On or standard barbed style fittings
- Sold in reels or by the foot


U Inch


Temperature: -40°F to 212°F or -40°C to 100°C (Normal Service)

ITEM NUMBER	HOSE I.D.	HOSE O.D.	APPROX. FEET PER REEL
Color: Black			
SG380	3/8	0.61	300
SG500	1/2	0.75	300
SG516	5/16	0.53	300
SG750	3/4	1.04	250
Color: Red			
RSG250	1/4	0.53	300
RSG380	3/8	0.53	300
RSG500	1/2	0.75	300
RSG750	3/4	1.04	250
Color: Blue			
BSG250	1/4	0.53	300
BSG380	3/8	0.61	300
BSG500	1/2	0.75	300
BSG750	3/4	1.04	250



Clear Reinforced PVC Hose

Features

- Sold in 100', 200' or 300' reel depending on hose size
- Compliant with FDA USDA 3-A and NSF-51
- Pressure rating between 65 and 250 psi
- Nominal ID from 3/16" to 2"
- Temperature ratings: 25°F to 150°F



U Inch



Temperature ratings: 25°F to 150°F

ITEM NUMBER	NOMINAL HOSE I.D.	NOMINAL HOSE O.D.	PSI RATING	APPROX. FEET PER REEL	WT PER FT (LBS)
CRPVC-019	3/16"	.38	250	300'	.05
CRPVC-025	1/4"	.43	250	300'	.07
CRPVC-025-100	1/4"	.43	250	100'	.07
CRPVC-031	5/16"	.53	300	300'	.08
CRPVC-031-100	5/16"	.53	300	100'	.08
CRPVC-038	3/8"	.59	250	300'	.09
CRPVC-038-100	3/8"	.59	250	100'	.09
CRPVC-050	1/2"	.71	250	300'	.15
CRPVC-050-100	1/2"	.71	250	100'	.015
CRPVC-063	5/8"	.87	200	300'	.17
CRPVC-063-100	5/8"	.87	200	100'	.17
.23CRPVC-075	3/4"	1.02	180	300'	.23
CRPVC-075-100	3/4"	1.02	180	100'	.23
CRPVC-100	1"	1.3	150	200'	.32
CRPVC-100-100	1"	1.3	150	100'	.32
CRPVC-125	1 1/4"	1.61	100	100'	.58
CRPVC-150	1 1/2"	1.89	85	100'	.69
CRPVC-200	2"	2.44	65	100'	1.00



Hose Clamps

Features

- Stainless Steel
- 7/16" hex and screwdriver slot for tightening
- 3 sizes to choose from depending on hose OD



U Inch

ITEM NUMBER	MAXIMUM HOSE O.D. FROM	MAXIMUM HOSE O.D. TO
SC-02	1/2"	3/4"
SC-08	3/4"	1"
SC-10	1"	1-3/8"

PTFE Thread Sealant Tape

Features

- Rolls on dry
- Seals thread on plug & connector fittings
- Provides leak-proof seal



U Inch

ITEM NUMBER	SIZE
TP-600	1/2 X 520

Hose Caddy

Features

- Keeps hoses and cables securely located
- 110 lb. magnetic pull force
- Designed for industrial settings
- Promotes safety and saves time
- Easily attach to any steel surface
- Steel and nylon construction



ITEM NUMBER	PACKAGE SIZE
HCL-1000	1 Individual Unit
HCL-4000	Pack of 4 Individual Units

