


## Plain Forged Eyebolts

PCS Company's Forged Eyebolts are Drop Forged Carbon Steel and fully threaded. Three styles to choose from; Plain Pattern, Shoulder Pattern and Metric Shoulder Pattern. Eyebolts are manufactured to ASME B18.15 and tested to ASTM A489 specifications. These entry level low cost mold handling eyebolts allow you to keep one on very mold. Easy to use with either a nylon sling or steel chain lifting sling.

**WARNING:** Load ratings are for only for vertical lifting. Load ratings drop 25% when used at 45°. Do not use at an angle greater than 45°. Do not use and discard if any eyebolt is bent, twisted or visibally damaged.



- Heavy Duty Drop Forged
- 1030 Carbon Steel
- Three Styles to choose from: Plain Pattern, Shoulder Pattern & Metric Shoulder Pattern
- Self-Colored
- Manufactured to ASME B18.15
- Tested to ASTM A489 specifications
- Made in USA

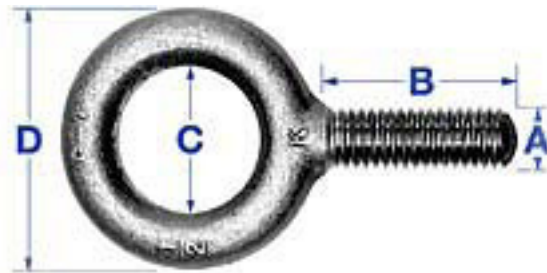

Item Number	UOM	Shoulder Option	A Thread Dia.	B Shank Length	C Eye ID	D Eye OD	Overall Length	Straight Lift Rated Capacity
13631	Inch	Plain	3/8-16	1-1/4"	0.94"	1.69"	2.81"	1300 LBS
13638	Inch	Plain	7/16-14	1-3/8"	1.0"	1.81"	3.06"	1800 LBS
13641	Inch	Plain	1/2-13	1-1/2"	1.12"	2.12"	3.50"	2400 LBS
13661	Inch	Plain	5/8-11	1-3/4"	1.31"	2.56"	4.19"	4000 LBS
13672	Inch	Plain	3/4-10	2"	1.44"	2.81"	4.69"	5000 LBS
13682	Inch	Plain	7/8-9	2-1/4"	1.56"	3.19"	5.31"	7000 LBS
13702	Inch	Plain	1-8	2-1/2"	1.69"	3.56"	5.94"	9000 LBS
13712	Inch	Plain	1-1/8-7	2-3/4"	1.94"	4.06"	6.69"	12000 LBS
13723	Inch	Plain	1-1/4 X 7	3"	2.12"	4.44"	7.31"	15000 LBS
13790	Inch	Plain	2-1/2 X 4	5"	3.81"	8.50"	13.19"	56000 LBS


## Shoulder Forged Eyebolts



PCS Company's Forged Eyebolts are Drop Forged Carbon Steel and fully threaded. Three styles to choose from; Plain Pattern, Shoulder Pattern and Metric Shoulder Pattern. Eyebolts are manufactured to ASME B18.15 and tested to ASTM A489 specifications. These entry level low cost mold handling eyebolts allow you to keep one on very mold. Easy to use with either a nylon sling or steel chain lifting sling.

**WARNING:** Load ratings are for only for vertical lifting. Load ratings drop 25% when used at 45°. Do not use at an angle greater than 45°. Do not use and discard if any eyebolt is bent, twisted or visibally damaged.

- Heavy Duty Drop Forged
- 1030 Carbon Steel
- Three Styles to choose from: Plain Pattern, Shoulder Pattern & Metric Shoulder Pattern
- Self-Colored
- Manufactured to ASME B18.15
- Tested to ASTM A489 specifications
- Made in USA

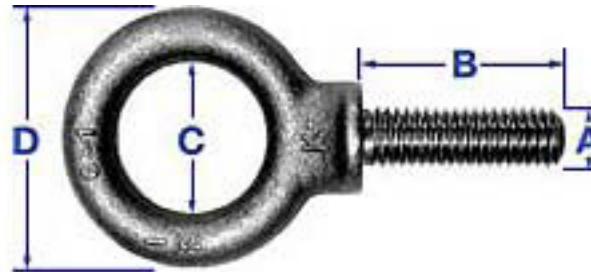


Item Number	UOM	Shoulder Option	A Thread Dia.	B Shank Length	C Eye ID	D Eye OD	Overall Length	Straight Lift Rated Capacity
14611	Inch	Shoulder	1/4 X 20	1"	.81"	1.19"	2.22"	500 LBS
14621	Inch	Shoulder	5/16 X 18	1-1/8"	.94"	1.44"	2.66"	900 LBS
14631	Inch	Shoulder	3/8-16	1-3/8"	1.06"	1.69"	3.09"	1300 LBS
14638	Inch	Shoulder	7/16-14	1-1/2"	1.12"	1.81"	3.41"	1800 LBS
14641	Inch	Shoulder	1/2-13	1-5/8"	1.25"	2.12"	3.81"	2400 LBS
14661	Inch	Shoulder	5/8-11	1-3/4"	1.44"	2.56"	4.56"	4000 LBS
14672	Inch	Shoulder	3/4-10	2-1/8"	1.56"	2.81"	5.06"	5000 LBS
14682	Inch	Shoulder	7/8-9	2-3/8"	1.69"	3.19"	5.75"	7000 LBS
14702	Inch	Shoulder	1-8	2-5/8"	1.81"	3.56"	6.44"	9000 LBS
14712	Inch	Shoulder	1-1/8-7	2-7/8"	2.06"	4.06"	7.31"	12000 LBS
14723	Inch	Shoulder	1-1/4-7	3-1/8"	2.25"	4.44"	8.0"	15000 LBS
14753	Inch	Shoulder	1-1/2-6	3-5/8"	2.56"	5.19"	9.22"	21000 LBS

## Metric Forged Eyebolts

PCS Company's Forged Eyebolts are Drop Forged Carbon Steel and fully threaded. Three styles to choose from; Plain Pattern, Shoulder Pattern and Metric Shoulder Pattern. Eyebolts are manufactured to ASME B18.15 and tested to ASTM A489 specifications. These entry level low cost mold handling eyebolts allow you to keep one on very mold. Easy to use with either a nylon sling or steel chain lifting sling.

**WARNING:** Load ratings are for only for vertical lifting. Load ratings drop 25% when used at 45°. Do not use at an angle greater than 45°. Do not use and discard if any eyebolt is bent, twisted or visibally damaged.

- Heavy Duty Drop Forged
- 1030 Carbon Steel
- Three Styles to choose from: Plain Pattern, Shoulder Pattern & Metric Shoulder Pattern
- Self-Colored
- Manufactured to ASME B18.15
- Tested to ASTM A489 specifications
- Made in USA

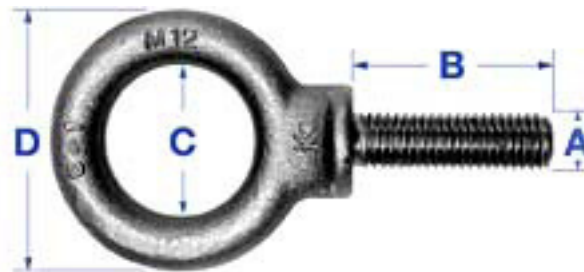

Item Number	UOM	Shoulder Option	A Thread Dia.	B Shank Length	C Eye ID	D Eye OD	Overall Length	Straight Lift Rated Capacity
14631M	Metric	Shoulder	M8x1.25	31.7 mm	25 mm	43 mm	3.09"	1110 LBS
14638M	Metric	Shoulder	M10x1.5	35 mm	27 mm	46 mm	3.09"	1628 LBS
14641M	Metric	Shoulder	M12x1.75	38 mm	30 mm	54 mm	3.81"	2266 LBS
14661M	Metric	Shoulder	M14x2	41.1 mm	33 mm	58 mm	3.81"	3520 LBS
14662M	Metric	Shoulder	M16x2	44.5 mm	35 mm	65 mm	4.56"	3520 LBS
14672M	Metric	Shoulder	M18x2.5	51 mm	38 mm	71.5 mm	4.56"	4708 LBS
14682M	Metric	Shoulder	M20x2.5	57 mm	41 mm	81 mm	5.06"	6292 LBS
14700M	Metric	Shoulder	M36x4	89 mm	63 mm	131.8 mm	9.22"	19734 LBS
14702M	Metric	Shoulder	M24x3	65.5 mm	46 mm	90.4 mm	6.44"	8470 LBS
14715M	Metric	Shoulder	M42x4.5	95 mm	73 mm	152.4 mm	9.22"	26312 LBS
14720M	Metric	Shoulder	M48x5	82 mm	82 mm	174.6 mm	10.50"	36080 LBS
14722M	Metric	Shoulder	M30x3.5	76 mm	55 mm	112.7 mm	7.31"	14080 LBS
14800M	Metric	Shoulder	M64x6	127 mm	102 mm	217.5 mm	14.59"	53931 LBS