
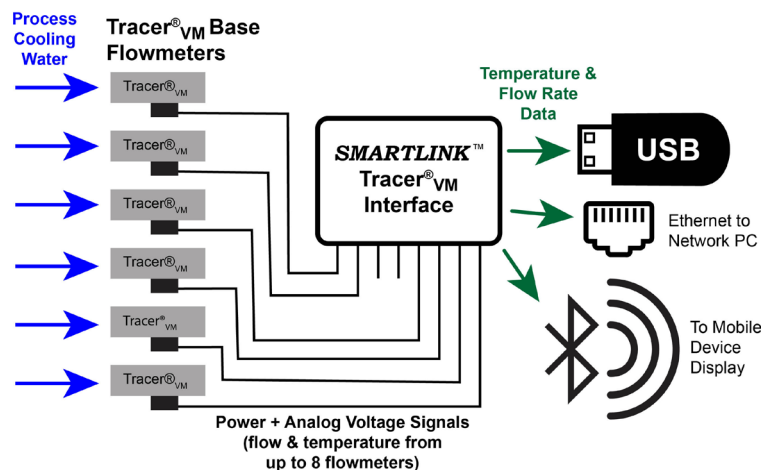


## Smartlink® Tracer®VM Interface

PCS Company offers the Smartlink® Tracer®VM Bluetooth Interface that collects, stores and transmits data from the TracerVM Base flowmeters that are in the cooling circuits. Each Bluetooth interface provides power to up to 8 TracerVM flowmeters and receives 0.5 to 4.0 analog voltage signals for both temperature and flow. The bluetooth interface can transmit to a PC over an ethernet connection for file storage and alerts or wirelessly to a mobile device. The PC-based Smartflow® Data Logger Software provides temperature and flow processing records that is useful in regulatory requirements and quality control.

- Transmit temperature and flow conditions in real time
- Housing is NEMA4X compliant
- Operating temperature: 32° to 125°F
- Maximum wireless range: 65.6 ft
- Maximum distance to flowmeter: 10 ft
- Power required: 8 to 28VDC with earth ground
- Cord grips: 9 pieces liquid tight
- Data logging software included
- 8 flowmeters per interface
- Smartphone, Tablet or PC purchased separately

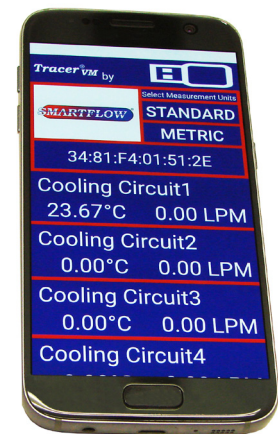

Item Number	Description
VMBTI-102	Smartlink® Tracer®VM Interface, bluetooth