


Radius Angle Pins

- Pre-machined spherical radius on head
- Used with PCS lifters and slides
- Premium hot work steel
- Precision ground, nitrided



SPECIFICATIONS

Core Hardness	35 - 40 Rc
Surface Hardness	65 - 74 Rc
Material Type	Hot Work Tool Steel
Unit of Measure	Inch

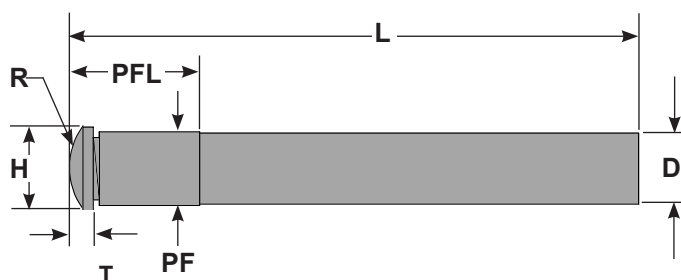

CATALOG NO.	NOMINAL PIN DIA.	D ACTUAL PIN DIA. +.0000 -.0005	PF PRESS FIT DIAMETER +.0005 -.0000	R HEAD RADIUS	H HEAD DIAMETER +.000 -.010	T HEAD THICKNESS +.000 -.005	PFL PRESSFIT LENGTH	L OVERALL LENGTH +.125 +.000
APR25-L5	3/8	0.374	0.376	3/8	1/2	1/4	7/8	5
APR25-L6	3/8	0.374	0.376	3/8	1/2	1/4	7/8	6
APR25-L7	3/8	0.374	0.376	3/8	1/2	1/4	1-3/8	7
APR25-L10	3/8	0.374	0.376	3/8	1/2	1/4	1-3/8	10
APR33-L5	1/2	0.499	0.501	1/2	5/8	1/4	7/8	5
APR33-L6	1/2	0.499	0.501	1/2	5/8	1/4	7/8	6
APR33-L7	1/2	0.499	0.501	1/2	5/8	1/4	1-3/8	7
APR33-L10	1/2	0.499	0.501	1/2	5/8	1/4	1-3/8	10
APR37-L6	5/8	0.624	0.626	5/8	3/4	1/4	7/8	6
APR37-L10	5/8	0.624	0.626	5/8	3/4	1/4	1-3/8	10
APR41-L7	3/4	0.749	0.751	3/4	7/8	1/4	1-3/8	7
APR41-L10	3/4	0.749	0.751	3/4	7/8	1/4	1-3/8	10
APR41-L14	3/4	0.749	0.751	3/4	7/8	1/4	1-3/8	14
APR47-L10	1	0.999	1.001	1	1-1/8	1/4	1-3/8	10
APR47-L14	1	0.999	1.001	1	1-1/8	1/4	1-3/8	14