


Spiral Brass Baffles - BSPT

Features

- Lengthens the cooling path with up to 11% greater flow rate
- Flush-seal type (7/8 taper) brass pipe plugs standard
- Solid brass solderless joint allows for 300% more wrenching torque
- Extra deep socket is stronger, and will not strip out
- Blade width tolerance is $\pm .005"/\pm .010"$
- Special straight lengths (S) available upon request

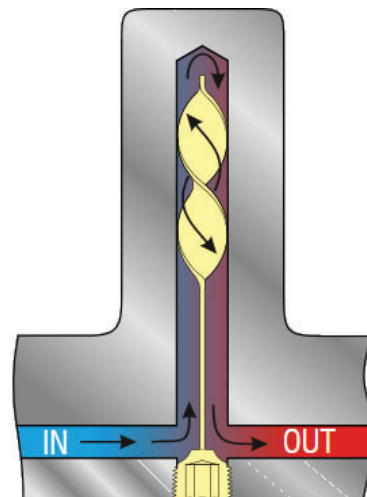

U Inch / Metric

ITEM NO.	OVERALL LENGTH	STRAIGHT LENGTH S	PLUG SIZE (BSPT)	DRILL DIAMETER	BLADE WIDTH ($\pm .005$)	BLADE THICKNESS
SB-125-4-BSP	4	2	1/8-28	5/16	0.312	0.057
SB-125-8-BSP	8	4	1/8-28	5/16	0.312	0.057
SB-125-12-BSP	12	6	1/8-28	5/16	0.312	0.057
SB-250-5-BSP	10	4	1/4-19	27/64	0.421	0.085
SB-250-10-BSP	15	6	1/4-19	27/64	0.421	0.085
SB-250-15-BSP	5	2	1/4-19	27/64	0.421	0.085
SB-375-6-BSP	12	4	3/8-19	9/16	0.562	0.093
SB-375-12-BSP	18	6	3/8-19	9/16	0.562	0.093
SB-375-18-BSP	6	2	3/8-19	9/16	0.562	0.093
SB-500-8-BSP	16	5	1/2-14	11/16	0.687	0.093
SB-500-16-BSP	8	3	1/2-14	11/16	0.687	0.093
SB-750-12-BSP	12	4	3/4-14	29/32	0.906	0.093
SB-750-20-BSP	20	6	3/4-14	29/32	0.906	0.093
SB-1000-16-BSP	16	5	1-11	1-1/8	1.125	0.093
SB-1000-24-BSP	24	8	1-11	1-1/8	1.125	0.093

