


Standard Elbows, Zinc Plated & Brass

Features

- Available in brass or zinc plated steel
- Easy socket wrench installation and removal requires minimal clearance
- Angular full flow path allows connecting fittings to be torqued tight without choking off flow
- One piece construction

Requires minimal clearance for installation and removal
Full flow path allows connecting fittings to be torqued tight without restricting flow.

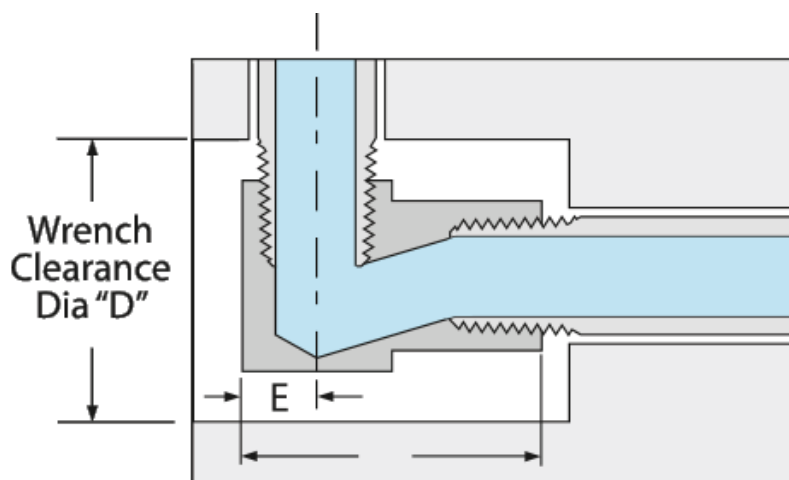

U Inch

ITEM NO. ZINC	ITEM NO. BRASS	A INPUT PIPE SIZE	B OUTPUT PIPE SIZE	L OVERALL LENGTH	E INPUT PIPE LOCATION	HEX SIZE	D WRENCH CLEARANCE
HS-0	HS-0-B	1/16	1/16	13/16	7/32	9/16	1
HS-1	HS-1-B	1/8	1/8	1	9/32	3/4	1-1/4
HS-2	HS-2-B	1/8	1/4	1-1/4	9/32	3/4	1-1/4
HS-3	HS-3-B	1/4	1/4	1-3/8	11/32	7/8	1-3/8
HS-4	HS-4-B	1/4	3/8	1-3/8	11/32	7/8	1-3/8
HS-5	HS-5-B	3/8	3/8	1-5/8	1/2	1	1-1/2
HS-6	HS-6-B	1/2	1/2	1-7/8	9/16	1-1/4	1-7/8
HS-7	HS-7-B	3/4	3/4	2-1/4	5/8	1-1/2	2-1/4

